



SIRIUS soft starter S0 32 A, 15 kW/400 V, 40 °C 200-480 V AC, 110-230 V AC/DC Screw terminals

### General technical data

|   |   |                          |
|---|---|--------------------------|
| <b>product brand name</b>   |   | SIRIUS                   |
| <b>product feature</b>  |   |                          |
| • integrated bypass contact system  |   | Yes                      |
| • thyristors  |   | Yes                      |
| <b>product function</b>   |   |                          |
| • intrinsic device protection   |   | No                       |
| • motor overload protection   |   | No                       |
| • evaluation of thermistor motor protection   |   | No                       |
| • external reset  |   | No                       |
| • adjustable current limitation   |   | No                       |
| • inside-delta circuit  |   | No                       |
| <b>product component motor brake output</b>   |   | No                       |
| <b>insulation voltage rated value</b>   | V | 600                      |
| <b>degree of pollution</b>  |   | 3, acc. to IEC 60947-4-2 |
| <b>reference code according to EN 61346-2</b>   |   | Q                        |
| <b>reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750</b> |   | G                        |

### Power Electronics

|   |    |              |
|---|----|--------------|
| <b>product designation</b>  |    | Soft starter |
| <b>operational current</b>  |    |              |
| • at 40 °C rated value  | A  | 32           |
| • at 50 °C rated value  | A  | 29           |
| • at 60 °C rated value  | A  | 26           |
| <b>yielded mechanical performance for 3-phase motors</b>  |    |              |
| • at 230 V  |    |              |
| — at standard circuit at 40 °C rated value  | kW | 7.5          |
| • at 400 V  |    |              |
| — at standard circuit at 40 °C rated value  | kW | 15           |
| <b>yielded mechanical performance [hp] for 3-phase AC motor at 200/208 V at standard circuit at 50 °C rated value</b> | hp | 7.5          |
| <b>operating frequency rated value</b>  | Hz | 50 ... 60    |
| <b>relative negative tolerance of the operating frequency</b>   | %  | -10          |
| <b>relative positive tolerance of the operating frequency</b>   | %  | 10           |
| <b>operating voltage at standard circuit rated value</b>  | V  | 200 ... 480  |
| <b>relative negative tolerance of the operating voltage at standard circuit</b>                                       | %  | -15          |
| <b>relative positive tolerance of the operating voltage at standard circuit</b>                                       | %  | 10           |
| <b>minimum load [%]</b>   | %  | 10           |
| <b>continuous operating current [% of I<sub>e</sub>] at 40 °C</b>   | %  | 115          |
| <b>power loss [W] at operational current at 40 °C during</b>  | W  | 13           |

operation typical

**Control circuit/ Control**

|  |    |             |
|--|----|-------------|
| type of voltage of the control supply voltage                            |    | AC/DC       |
| control supply voltage frequency 1 rated value                           | Hz | 50          |
| control supply voltage frequency 2 rated value                           | Hz | 60          |
| relative negative tolerance of the control supply voltage frequency      | %  | -10         |
| relative positive tolerance of the control supply voltage frequency      | %  | 10          |
| control supply voltage 1 at AC at 50 Hz                                  | V  | 110 ... 230 |
| control supply voltage 1 at AC at 60 Hz                                  | V  | 110 ... 230 |
| relative negative tolerance of the control supply voltage at AC at 50 Hz | %  | -15         |
| relative positive tolerance of the control supply voltage at AC at 50 Hz | %  | 10          |
| relative negative tolerance of the control supply voltage at AC at 60 Hz | %  | -15         |
| relative positive tolerance of the control supply voltage at AC at 60 Hz | %  | 10          |
| control supply voltage 1 at DC   | V  | 110 ... 230 |
| relative negative tolerance of the control supply voltage at DC          | %  | -15         |
| relative positive tolerance of the control supply voltage at DC          | %  | 10          |
| display version for fault signal   |    | red         |

**Mechanical data**

|   |    |  |
|---|----|--|
| size of engine control device               |    | S0   |
| width                                       | mm | 45   |
| height                                      | mm | 125  |
| depth                                       | mm | 150  |
| fastening method                            |    | screw and snap-on mounting   |
| mounting position                           |    | With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° tiltable to the front and back |
| required spacing with side-by-side mounting |    |  |
| • upwards                                   | mm | 60   |
| • at the side                               | mm | 15   |
| • downwards                                 | mm | 40   |
| wire length maximum                         | m  | 300  |
| number of poles for main current circuit    |    | 3  |

**Connections/ Terminals**

|  |  |  |
|--|--|--|
| type of electrical connection  |  |  |
| • for main current circuit   |  | screw-type terminals   |
| • for auxiliary and control circuit  |  | screw-type terminals   |
| number of NC contacts for auxiliary contacts   |  | 0  |
| number of NO contacts for auxiliary contacts   |  | 1  |
| number of CO contacts for auxiliary contacts   |  | 0  |
| type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point |  |  |
| • solid  |  | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ) |
| • finely stranded with core end processing   |  | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ) |
| type of connectable conductor cross-sections at AWG cables for main contacts for box terminal                  |  |  |
| • using the front clamping point   |  | 1x 8, 2x (16 ... 10)   |
| type of connectable conductor cross-sections for auxiliary contacts  |  |  |
| • solid  |  | 2x (0.5 ... 2.5 mm <sup>2</sup> )                                |
| • finely stranded with core end processing   |  | 2x (0.5 ... 1.5 mm <sup>2</sup> )                                |
| type of connectable conductor cross-sections at AWG cables   |  |  |
| • for auxiliary contacts   |  | 2x (20 ... 14)   |
| • for auxiliary contacts finely stranded with core end processing  |  | 2x (20 ... 16)   |

**Ambient conditions**

|   |   |       |
|---|---|-------|
| installation altitude at height above sea level | m | 5 000 |
|---|---|-------|

**environmental category**

- during transport according to IEC 60721
- during storage according to IEC 60721
  
- during operation according to IEC 60721

**ambient temperature**

- during operation
- during storage

**derating temperature**

**protection class IP on the front according to IEC 60529**

**touch protection on the front according to IEC 60529**

|    |   |
|----|---|
|    | 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)   |
|    | 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4       |
|    | 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 |
| °C | -25 ... +60   |
| °C | -40 ... +80   |
| °C | 40  |
|    | IP20  |
|    | finger-safe, for vertical contact from the front  |

**Certificates/ approvals**

General Product Approval

EMC



[Confirmation](#)



Declaration of Conformity

Test Certificates

other



[Type Test Certificates/Test Report](#)

[Confirmation](#)

[Miscellaneous](#)

**UL/CSA ratings**

**yielded mechanical performance [hp] for 3-phase AC motor**

- at 220/230 V
  - at standard circuit at 50 °C rated value
- at 460/480 V
  - at standard circuit at 50 °C rated value

|    |             |
|----|-------------|
| hp | 7.5         |
| hp | 20          |
|    | B300 / R300 |

**contact rating of auxiliary contacts according to UL**

**Further information**

**Simulation Tool for Soft Starters (STS)**

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW3027-1BB14>

**Cax online generator**



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW3027-1BB14>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RW3027-1BB14>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW3027-1BB14&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW3027-1BB14&lang=en)

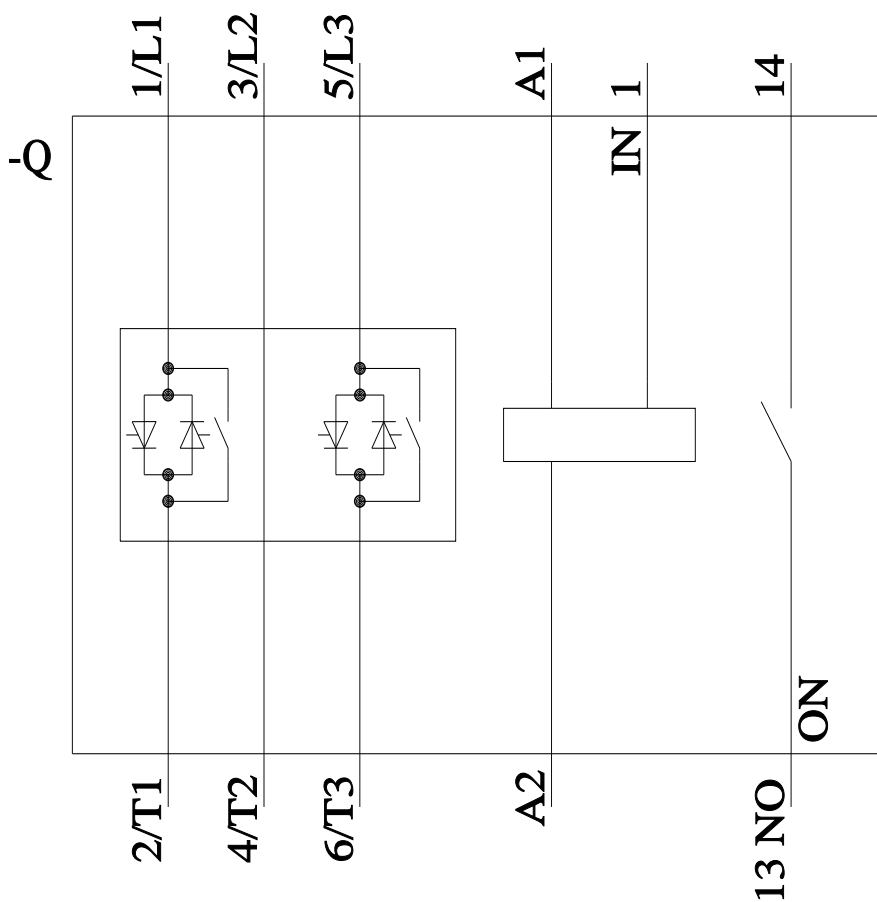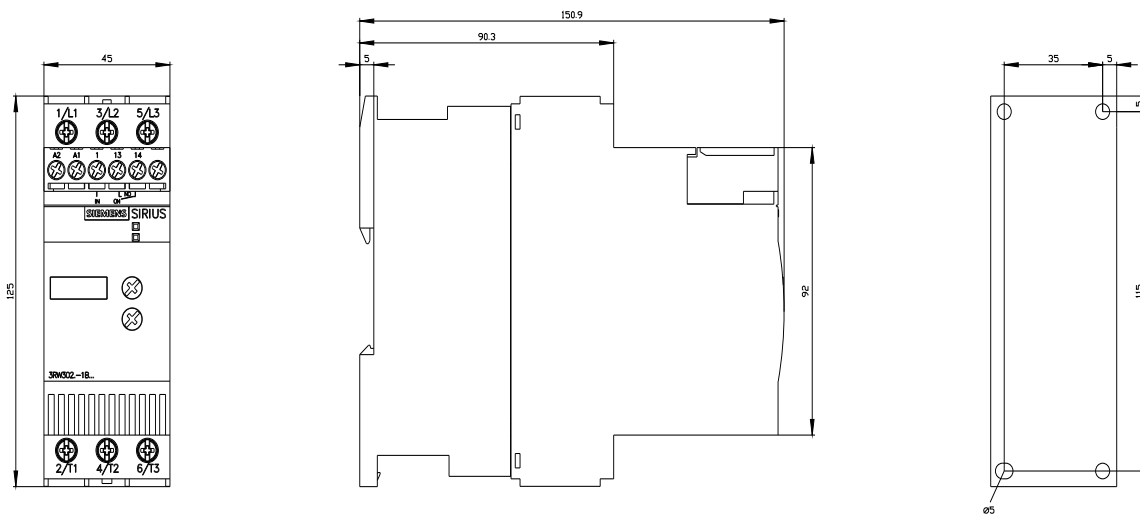

last modified:

1/16/2022