SIEMENS

Data sheet 3RW3037-1BB14



SIRIUS soft starter S2 63 A, 30 kW/400 V, 40 $^{\circ}\text{C}$ 200-480 V AC, 110-230 V AC/DC Screw terminals

General technical data		
product brand name		SIRIUS
product feature		
 integrated bypass contact system 		Yes
• thyristors		Yes
product function		
 intrinsic device protection 		No
 motor overload protection 		No
 evaluation of thermistor motor protection 		No
external reset		No
 adjustable current limitation 		No
 inside-delta circuit 		No
product component motor brake output		No
insulation voltage rated value	V	600
degree of pollution		3, acc. to IEC 60947-4-2
reference code according to EN 61346-2		Q
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750		G
Power Electronics		
product designation		Soft starter
operational current		
 at 40 °C rated value 	Α	63
 at 50 °C rated value 	Α	58
 at 60 °C rated value 	Α	53
yielded mechanical performance for 3-phase motors		
• at 230 V		
 — at standard circuit at 40 °C rated value 	kW	18.5
● at 400 V		
 — at standard circuit at 40 °C rated value 	kW	30
yielded mechanical performance [hp] for 3-phase AC motor at 200/208 V at standard circuit at 50 °C rated value	hp	15
operating frequency rated value	Hz	50 60
relative negative tolerance of the operating frequency	%	-10
relative positive tolerance of the operating frequency	%	10
operating voltage at standard circuit rated value	V	200 480
relative negative tolerance of the operating voltage at standard circuit	%	-15
relative positive tolerance of the operating voltage at standard circuit	%	10
minimum load [%]	%	10
continuous operating current [% of le] at 40 °C	%	115
power loss [W] at operational current at 40 °C during	W	12

operation typical		
Control circuit/ Control		
type of voltage of the control supply voltage		AC/DC
control supply voltage frequency 1 rated value	Hz	50
control supply voltage frequency 2 rated value	Hz	60
relative negative tolerance of the control supply	%	-10
voltage frequency		
relative positive tolerance of the control supply	%	10
voltage frequency		440 000
control supply voltage 1 at AC at 50 Hz	V	110 230 110 230
control supply voltage 1 at AC at 60 Hz	-	
relative negative tolerance of the control supply voltage at AC at 50 Hz	%	-10
relative positive tolerance of the control supply voltage at AC at 50 Hz	%	10
relative negative tolerance of the control supply voltage at AC at 60 Hz	%	-10
relative positive tolerance of the control supply voltage at AC at 60 Hz	%	10
control supply voltage 1 at DC	V	110 230
relative negative tolerance of the control supply voltage at DC	%	-10
relative positive tolerance of the control supply voltage at DC	%	10
display version for fault signal		red
Mechanical data		
size of engine control device		S2
width	mm	55
height	mm	160
depth	mm	170
fastening method		screw and snap-on mounting
mounting position		With vertical mounting surface +/-10° rotatable, with
		vertical mounting surface +/- 10° tiltable to the front and back
required spacing with side-by-side mounting		
• upwards	mm	60
at the side	mm	30
downwards	mm	40
wire length maximum	m	300
number of poles for main current circuit		3
Connections/ Terminals		
type of electrical connection		caray type terminals
for main current circuit for a william and control circuit		screw-type terminals
 for auxiliary and control circuit number of NC contacts for auxiliary contacts 		screw-type terminals 0
number of NO contacts for auxiliary contacts number of CO contacts for auxiliary contacts		1
type of connectable conductor cross-sections for main contacts for box terminal using the front		
clamping point		
• solid		2x (1.5 16 mm²)
finely stranded with core end processing		1.5 25 mm ²
 stranded type of connectable conductor cross-sections for main contacts for box terminal using the back 		1.5 35 mm²
clamping point • solid		2x (1.5 16 mm²)
		1.5 25 mm ²
finely stranded with core end processingstranded		1.5 35 mm ²
type of connectable conductor cross-sections for main contacts for box terminal using both clamping points		
• solid		2x (1.5 16 mm²)
 finely stranded with core end processing 		2x (1.5 16 mm²)
• stranded		2x (1.5 25 mm²)
type of connectable conductor cross-sections at AWG		

cables for main contacts for box terminal		
 using the back clamping point 		16 2
 using the front clamping point 		18 2
 using both clamping points 		2x (16 2)
type of connectable conductor cross-sections for auxiliary contacts		
• solid		2x (0.5 2.5 mm²)
 finely stranded with core end processing 		2x (0.5 1.5 mm²)
type of connectable conductor cross-sections at AWG cables		
 for auxiliary contacts 		2x (20 14)
 for auxiliary contacts finely stranded with core end processing 		2x (20 16)
Ambient conditions		
installation altitude at height above sea level	m	5 000
environmental category		
 during transport according to IEC 60721 		2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
 during storage according to IEC 60721 		1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
 during operation according to IEC 60721 		3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
ambient temperature		
during operation	°C	-25 +60
during storage	°C	-40 +80
derating temperature	°C	40
protection class IP on the front according to IEC 60529		IP20
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front
Certificates/ approvals		

(E)

General Product Approval

Confirmation









EMC

Declaration of Conformity	Test Certificates		other		Railway
C €	Special Test Certificate ate	Type Test Certificates/Test Report	Miscellaneous	Confirmation	Confirmation

Railway

Vibration and Shock

UL/CSA ratings		
yielded mechanical performance [hp] for 3-phase AC motor		
• at 220/230 V		
 at standard circuit at 50 °C rated value 	hp	20
• at 460/480 V		
 at standard circuit at 50 °C rated value 	hp	40
contact rating of auxiliary contacts according to UL		B300 / R300
Further information		

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW3037-1BB14


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW3037-1BB14


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RW3037-1BB14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax de.aspx?mlfb=3RW3037-1BB14&lang=en







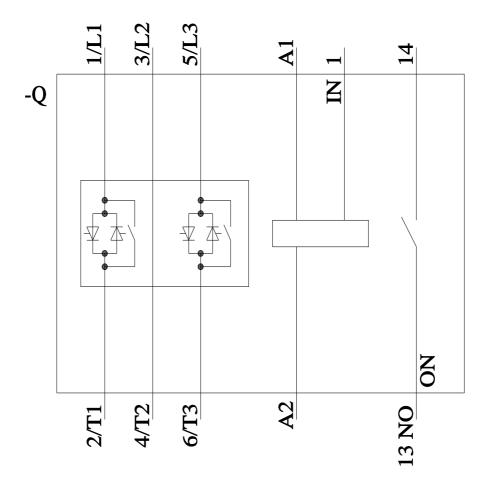

last modified: 1/16/2022 🖸