SIEMENS

Data sheet

3RT2016-1AP01



power contactor, AC-3e/AC-3, 9 A, 4 kW / 400 V, 3-pole, 230 V AC, 50/60 Hz, auxiliary contacts: 1 NO, screw terminal

product brand name				
	SIRIUS			
product designation	Power contactor			
product type designation	3RT2			
General technical data				
size of contactor	S00			
product extension				
 function module for communication 	No			
 auxiliary switch 	Yes			
power loss [W] for rated value of the current				
 at AC in hot operating state 	0.9 W			
 at AC in hot operating state per pole 	0.3 W			
 without load current share typical 	4.2 W			
insulation voltage				
 of main circuit with degree of pollution 3 rated value 	690 V			
 of auxiliary circuit with degree of pollution 3 rated value 	690 V			
surge voltage resistance				
 of main circuit rated value 	6 kV			
 of auxiliary circuit rated value 	6 kV			
maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1	400 V			
shock resistance at rectangular impulse				
• at AC	6,7g / 5 ms, 4,2g / 10 ms			
shock resistance with sine pulse				
● at AC	10,5g / 5 ms, 6,6g / 10 ms			
mechanical service life (operating cycles)				
 of contactor typical 	30 000 000			
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000			
 of the contactor with added auxiliary switch block typical 	10 000 000			
reference code according to IEC 81346-2	Q			
Substance Prohibitance (Date)	10/01/2009			
Ambient conditions				
installation altitude at height above sea level maximum	2 000 m			
ambient temperature				
 during operation 	-25 +60 °C			
 during storage 	-55 +80 °C			
relative humidity minimum	10 %			
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %			
Main circuit				

number of poles for main current circuit	3
number of NO contacts for main contacts operating voltage	3
at AC-3 rated value maximum	690 V
• at AC-3e rated value maximum	690 V
operational current	
• at AC-1 at 400 V at ambient temperature 40 °C	22 A
rated value ● at AC-1	
 at AC-1 — up to 690 V at ambient temperature 40 °C 	22 A
rated value	
— up to 690 V at ambient temperature 60 °C	20 A
rated value • at AC-3	
- at 400 V rated value	9 A
— at 500 V rated value	7.7 A
— at 690 V rated value	6.7 A
• at AC-3e	
— at 400 V rated value	9 A
— at 500 V rated value	7.7 A
 at 690 V rated value at AC-4 at 400 V rated value 	6.7 A 8.5 A
 at AC-5a up to 690 V rated value 	19.4 A
• at AC-5b up to 400 V rated value	7.4 A
• at AC-6a	
 — up to 230 V for current peak value n=20 rated value 	5.3 A
— up to 400 V for current peak value n=20 rated	5.3 A
value — up to 500 V for current peak value n=20 rated	5.3 A
value — up to 690 V for current peak value n=20 rated	5 A
value	
• at AC-6a	3.5 A
 — up to 230 V for current peak value n=30 rated value 	3.5 A
 — up to 400 V for current peak value n=30 rated value 	3.5 A
 — up to 500 V for current peak value n=30 rated value 	3.6 A
— up to 690 V for current peak value n=30 rated value	3.3 A
minimum cross-section in main circuit at maximum AC-1 rated value	4 mm²
operational current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	4.1 A
• at 690 V rated value	3.3 A
operational current	
• at 1 current path at DC-1	
- at 24 V rated value	20 A 20 A
— at 60 V rated value — at 110 V rated value	20 A 2.1 A
— at 220 V rated value	0.8 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
 with 2 current paths in series at DC-1 	
— at 24 V rated value	20 A
— at 60 V rated value — at 110 V rated value	20 A 12 A
— at 220 V rated value	1.6 A
— at 440 V rated value	0.8 A
— at 600 V rated value	0.7 A
• with 3 current paths in series at DC-1	
- at 24 V rated value	20 A
— at 60 V rated value	20 A

— at 110 V rated value	20 A
— at 220 V rated value	20 A
— at 440 V rated value	1.3 A
— at 600 V rated value	1 A
 at 1 current path at DC-3 at DC-5 	
— at 24 V rated value	20 A
— at 60 V rated value	0.5 A
— at 110 V rated value	0.15 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	20 A
— at 60 V rated value	5 A
— at 110 V rated value	0.35 A
• with 3 current paths in series at DC-3 at DC-5	
— at 24 V rated value	20 A
— at 60 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	1.5 A
— at 440 V rated value	0.2 A
— at 600 V rated value	0.2 A
operating power • at AC-3	
• at AC-3 — at 230 V rated value	2.2 kW
— at 200 V rated value	4 kW
— at 500 V rated value	4 kW
— at 690 V rated value	5.5 kW
• at AC-3e	5.5 KW
— at 230 V rated value	2.2 kW
— at 400 V rated value	4 kW
— at 500 V rated value	4 kW
— at 690 V rated value	5 kW
operating power for approx. 200000 operating cycles	
at AC-4	
 at 400 V rated value 	2 kW
 at 690 V rated value 	2.5 kW
operating apparent power at AC-6a	
 up to 230 V for current peak value n=20 rated value 	2 kVA
 up to 400 V for current peak value n=20 rated value 	3.6 kVA
 up to 500 V for current peak value n=20 rated value 	4.6 kVA
 up to 690 V for current peak value n=20 rated value 	5.9 kVA
operating apparent power at AC-6a	
• up to 230 V for current peak value n=30 rated value	1.3 kVA
• up to 400 V for current peak value n=30 rated value	2.4 kVA
• up to 500 V for current peak value n=30 rated value	3.1 kVA
 up to 690 V for current peak value n=30 rated value short-time withstand current in cold operating state 	4 kVA
up to 40 °C	
 limited to 1 s switching at zero current maximum 	155 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 5 s switching at zero current maximum 	111 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 10 s switching at zero current maximum 	86 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 30 s switching at zero current maximum 	66 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 60 s switching at zero current maximum 	55 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at AC	10 000 1/h
operating frequency	
• at AC-1 maximum	1 000 1/h
• at AC-2 maximum	750 1/h
 at AC-3 maximum 	750 1/h
• at AC-3e maximum	750 1/h
● at AC-4 maximum	250 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage at AC	
• at 50 Hz rated value	230 V
• at 60 Hz rated value	230 V


Subject to change without notice © Copyright Siemens


operating range factor control supply voltage rated	
value of magnet coil at AC	
• at 50 Hz	0.8 1.1
• at 60 Hz	0.85 1.1
apparent pick-up power of magnet coil at AC	
• at 50 Hz	27 VA
• at 60 Hz	24.3 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.8
• at 60 Hz	0.75
apparent holding power of magnet coil at AC	4.0.1/4
• at 50 Hz	4.2 VA
• at 60 Hz	3.3 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.25
• at 60 Hz	0.25
closing delay	
• at AC	9 35 ms
opening delay	
• at AC	4 15 ms
arcing time	10 15 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NO contacts for auxiliary contacts instantaneous contact	1
operational current at AC-12 maximum	10 A
operational current at AC-15	
at 230 V rated value	10 A
 at 400 V rated value 	3 A
• at 500 V rated value	2 A
• at 690 V rated value	1 A
operational current at DC-12	
 at 24 V rated value 	10 A
 at 48 V rated value 	6 A
 at 60 V rated value 	6 A
 at 110 V rated value 	3 A
 at 125 V rated value 	2 A
 at 220 V rated value 	1 A
at 600 V rated value	0.15 A
operational current at DC-13	
at 24 V rated value	10 A
at 48 V rated value	2 A
• at 60 V rated value	2 A
at 110 V rated value	1 A
 at 125 V rated value at 220 V rated value 	0.9 A 0.3 A
at 600 V rated value	0.3 A 0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	7.6 A
at 400 V rated value	9 A
yielded mechanical performance [hp]	
• for single-phase AC motor	
— at 110/120 V rated value	0.33 hp
— at 230 V rated value	1 hp
• for 3-phase AC motor	
— at 200/208 V rated value	2 hp
— at 220/230 V rated value	3 hp
— at 460/480 V rated value	5 hp
— at 575/600 V rated value	7.5 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	


design of the fuse link				
 for short-circuit protection of the main circuit 				
 — with type of coordination 1 required 	gG: 35A (690V,100kA), aM: 20A (690V,100kA), BS88: 35A (415V,80kA)			
 — with type of assignment 2 required 	gG: 20A (690V,100kA), aM: 16A (690V, 100kA), BS88: 20A (415V,			
 for short-circuit protection of the auxiliary switch 	80kA) gG: 10 A (500 V, 1 kA)			
required	ge. 1077 (000 V, 1107)			
Installation/ mounting/ dimensions				
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted			
	forward and backward by +/- 22.5° on vertical mounting surface			
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715			
 side-by-side mounting 	Yes			
height	58 mm			
width	45 mm			
depth	73 mm			
required spacing				
with side-by-side mounting				
— forwards	10 mm			
— upwards	10 mm			
— downwards	10 mm			
— at the side	0 mm			
 for grounded parts 				
— forwards	10 mm			
— upwards	10 mm			
— at the side	6 mm			
— downwards	10 mm			
 for live parts 				
— forwards	10 mm			
— upwards	10 mm			
— downwards	10 mm			
— at the side	6 mm			
Connections/ Terminals				
type of electrical connection				
type of electrical connection • for main current circuit	screw-type terminals			
 type of electrical connection for main current circuit for auxiliary and control circuit 	screw-type terminals			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts 	screw-type terminals Screw-type terminals			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil 	screw-type terminals			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main 	screw-type terminals Screw-type terminals			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts 	screw-type terminals Screw-type terminals Screw-type terminals			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid 	screw-type terminals Screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ²			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • solid or stranded	screw-type terminals Screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0,5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ²			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid 	screw-type terminals Screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ²			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • solid or stranded • finely stranded with core end processing connectable conductor cross-section for main	screw-type terminals Screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0,5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ²			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • solid or stranded • finely stranded with core end processing connectable conductor cross-section for main contacts	screw-type terminals Screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²)			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid solid or stranded solid stranded with core end processing 	screw-type terminals Screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0,5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 0.5 4 mm ²			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • solid or stranded • finely stranded with core end processing connectable conductor cross-section for main contacts • solid • stranded • finely stranded with core end processing connectable conductor cross-section for main contacts • solid • stranded • finely stranded with core end processing connectable conductor cross-section for auxiliary contacts	screw-type terminals Screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 0.5 4 mm ² 0.5 4 mm ² 0.5 2.5 mm ²			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • solid or stranded • finely stranded with core end processing connectable conductor cross-section for main contacts • solid • solid • solid • finely stranded with core end processing contacts • solid • stranded • finely stranded with core end processing connectable conductor cross-section for main contacts • solid • stranded • finely stranded with core end processing connectable conductor cross-section for auxiliary contacts • solid or stranded • solid or stranded	screw-type terminals Screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 0.5 4 mm ² 0.5 4 mm ² 0.5 4 mm ²			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • solid or stranded • finely stranded with core end processing connectable conductor cross-section for main contacts • solid • solid • finely stranded with core end processing contacts • solid • stranded • finely stranded with core end processing connectable conductor cross-section for main contacts • solid • stranded • finely stranded with core end processing contacts • solid or stranded • finely stranded with core end processing contacts • solid or stranded • solid or stranded • solid or stranded • solid or stranded • finely stranded with core end processing	screw-type terminals Screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 0.5 4 mm ² 0.5 4 mm ² 0.5 2.5 mm ²			
type of electrical connection • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil type of connectable conductor cross-sections for main contacts • solid • solid or stranded • finely stranded with core end processing connectable conductor cross-section for main contacts • solid • solid • stranded • finely stranded with core end processing connectable conductor cross-section for main contacts • solid • stranded • finely stranded with core end processing connectable conductor cross-section for auxiliary contacts • solid or stranded • solid or stranded • finely stranded with core end processing type of connectable conductor cross-section for auxiliary contacts • solid or stranded • finely stranded with core end processing type of connectable conductor cross-section for auxiliary contacts	screw-type terminals Screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 0.5 4 mm ² 0.5 4 mm ² 0.5 4 mm ²			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for auxiliary contacts solid stranded finely stranded with core end processing connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-section for auxiliary contacts for auxiliary contacts 	screw-type terminals Screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 0.5 4 mm ² 0.5 4 mm ² 0.5 2.5 mm ²			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing totat cross-section for auxiliary contacts solid or stranded finely stranded with core end processing 	screw-type terminals Screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 0.5 4 mm ² 0.5 4 mm ² 0.5 2.5 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ²			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded for auxiliary contacts solid or stranded for auxiliary contacts solid or stranded for auxiliary contacts molid or stranded molid or stranded	screw-type terminals Screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 0.5 4 mm ² 0.5 4 mm ² 0.5 2.5 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ²			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid solid stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded finely stranded with core end processing 	screw-type terminals Screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 0.5 4 mm ² 0.5 4 mm ² 0.5 2.5 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ²			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid slid solid solid solid stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded for auxiliary contacts solid or stranded mely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts a solid or stranded mely stranded with core end processing 	screw-type terminals Screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 0.5 4 mm ² 0.5 4 mm ² 0.5 2.5 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ²			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid solid solid stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts a solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts a solid or stranded finely stranded with core end processing at AWG cables for auxiliary contacts AWG number as coded connectable conductor cross section for main contacts 	screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 0.5 4 mm ² 0.5 4 mm ² 0.5 2.5 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 2x (20 16), 2x (18 14), 2x 12 20 12			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded for auxiliary contacts at AWG cables for auxiliary contacts AWG number as coded connectable conductor cross section for main contacts for auxiliary contacts 	screw-type terminals Screw-type terminals Screw-type terminals $2x (0.5 \dots 1.5 \text{ mm}^2), 2x (0.75 \dots 2.5 \text{ mm}^2), 2x 4 \text{ mm}^2$ $2x (0.5 \dots 1.5 \text{ mm}^2), 2x (0.75 \dots 2.5 \text{ mm}^2), 2x 4 \text{ mm}^2$ $2x (0.5 \dots 1.5 \text{ mm}^2), 2x (0.75 \dots 2.5 \text{ mm}^2)$ $0.5 \dots 4 \text{ mm}^2$ $0.5 \dots 4 \text{ mm}^2$ $0.5 \dots 2.5 \text{ mm}^2$ $0.5 \dots 2.5 \text{ mm}^2$ $2x (0.5 \dots 1.5 \text{ mm}^2), 2x (0.75 \dots 2.5 \text{ mm}^2), 2x 4 \text{ mm}^2$ $2x (0.5 \dots 1.5 \text{ mm}^2), 2x (0.75 \dots 2.5 \text{ mm}^2), 2x 4 \text{ mm}^2$ $2x (0.5 \dots 1.5 \text{ mm}^2), 2x (0.75 \dots 2.5 \text{ mm}^2), 2x 4 \text{ mm}^2$ $2x (0.5 \dots 1.5 \text{ mm}^2), 2x (0.75 \dots 2.5 \text{ mm}^2), 2x 4 \text{ mm}^2$ $2x (20 \dots 16), 2x (18 \dots 14), 2x 12$			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded finely stranded with core end processing at AWG cables for auxiliary contacts AWG number as coded connectable conductor cross section for main contacts for auxiliary contacts 	screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 0.5 4 mm ² 0.5 4 mm ² 0.5 2.5 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 2x (20 16), 2x (18 14), 2x 12 20 12			
type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid solid stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded finely stranded with core end processing at AWG cables for auxiliary contacts AWG number as coded connectable conductor cross section for main contacts for auxiliary contacts AWG number as coded connectable conductor cross section for auxiliary contacts for auxiliary contacts Safety related data product function	screw-type terminals Screw-type terminals Screw-type terminals $2x (0.5 \dots 1.5 \text{ mm}^2), 2x (0.75 \dots 2.5 \text{ mm}^2), 2x 4 \text{ mm}^2$ $2x (0.5 \dots 1.5 \text{ mm}^2), 2x (0.75 \dots 2.5 \text{ mm}^2), 2x 4 \text{ mm}^2$ $2x (0.5 \dots 1.5 \text{ mm}^2), 2x (0.75 \dots 2.5 \text{ mm}^2)$ $0.5 \dots 4 \text{ mm}^2$ $0.5 \dots 4 \text{ mm}^2$ $0.5 \dots 2.5 \text{ mm}^2$ $2x (0.5 \dots 1.5 \text{ mm}^2), 2x (0.75 \dots 2.5 \text{ mm}^2), 2x 4 \text{ mm}^2$ $2x (0.5 \dots 1.5 \text{ mm}^2), 2x (0.75 \dots 2.5 \text{ mm}^2), 2x 4 \text{ mm}^2$ $2x (20 \dots 1.5 \text{ mm}^2), 2x (0.75 \dots 2.5 \text{ mm}^2), 2x 4 \text{ mm}^2$ $2x (20 \dots 1.5 \text{ mm}^2), 2x (18 \dots 14), 2x 12$ $20 \dots 12$			
 type of electrical connection for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts of magnet coil type of connectable conductor cross-sections for main contacts solid solid or stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for main contacts solid stranded finely stranded with core end processing connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-section for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded finely stranded with core end processing type of connectable conductor cross-sections for auxiliary contacts solid or stranded finely stranded with core end processing at AWG cables for auxiliary contacts AWG number as coded connectable conductor cross section for main contacts for auxiliary contacts 	screw-type terminals Screw-type terminals 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1,5 mm ²), 2x (0.75 2,5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 0.5 4 mm ² 0.5 4 mm ² 0.5 2.5 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²), 2x 4 mm ² 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 2x (0.5 1.5 mm ²), 2x (0.75 2.5 mm ²) 2x (20 16), 2x (18 14), 2x 12 20 12			


 with high dema failure rate [FIT] with 	rous failures d rate according to SN nd rate according to SN low demand rate accord	I 31920	40 % 73 % 100 FIT					
31920 T1 value for proof test interval or service life according to			20 a					
IEC 61508 protection class IP on the front according to IEC 60529			IP20	IP20				
touch protection on the front according to IEC 60529 suitability for use			finger-safe, for vertical contact from the front					
safety-related s	0		Yes					
General Product Ap	Certificates/ approvals							
General Froduct Ap								
(S) S	Confirmation		(١	<u>KC</u>	EHC		
ЕМС	Functional Safety/Safety of Machinery	Declaration of	of Conformity		Test Certificates			
RCM	<u>Type Examination</u> <u>Certificate</u>	CE EG-Konf.		K	<u>Type Test Certific-</u> ates/Test Report	<u>Special Test Certific-</u> <u>ate</u>		
Marine / Shipping			_		æ	<i>(</i>)		
ABS				ovds gister rs	PRS	RINA		
Marine / Shipping	other				Railway			
KMRS	<u>Confirmation</u>	DE	<u>Confi</u>	mation	Vibration and Shock			
Further information	ackaging							
https://support.industr	y.siemens.com/cs/ww/e							
https://www.siemens.		gs, Brocnures,.)					
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2016-1AP01 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2016-1AP01								
Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3RT2016-1AP01 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2016-1AP01⟨=en Characteristic: Tripping characteristics, I ² t, Let-through current								
https://support.industr	y.siemens.com/cs/ww/e	en/ps/3RT2016-	1AP01/char					
Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2016-1AP01&objecttype=14&gridview=view1								

2/13/2023 **SIEMENS KALA** Subject to change without notice © Copyright Siemens








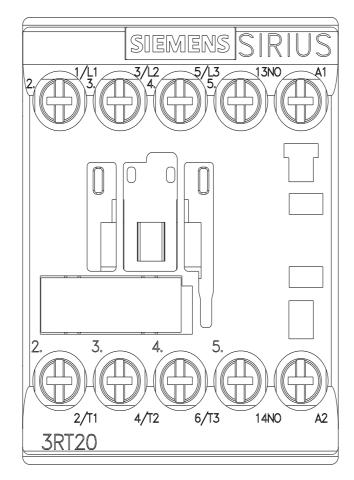

3RT20161AP01 Page 7/8

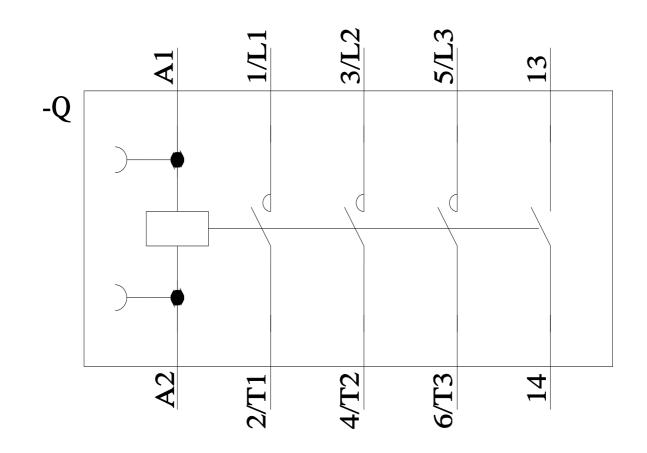

last modified:

2/10/2023 🖸